

**OW1041 – COLONNADE™**  
Outdoor only



Type: Project:

[VisaLighting.com/products/Colonnade](http://VisaLighting.com/products/Colonnade)

Fill in shaded boxes using information listed below

Order Code: **OW1041**  
MODEL

**MVOLT**  
VOLTAGE

**A** SOURCE

**B** FINISH

**C** OPTION




The Colonnade family features an iconic design that exhibits a clean, architectural look. Available in 16 standard paint finish choices and multiple trims and sizes.

**DIMENSIONS**

Depth is measured from wall to front of fixture

W = Width H = Height D = Depth

W	7-3/8"	(187 mm)
H	15-1/4"	(387 mm)
D	5"	(127 mm)



**A SOURCE (Select one) and VOLTAGE**

MVOLT fixture accepts 120 through 277 input voltage  
LED sources are 83CRI, within 3-step MacAdam and are dimmable 0-10V to 1%

LED Sources	CCT	Delivered Lumens	Power (Watts)	Voltage
• L30K-L	3000K	900	10	MVOLT
L35K-L	3500K			
• L40K-L	4000K	1300	15	
• L30K-H	3000K			
L35K-H	3500K	1400		
• L40K-H	4000K			

**B FINISHES (Select one)**

See page 2 for color chart

Powder Coat Painted Finishes (Standard)

<b>AG7038</b> Agate Grey	<b>CVBL</b> Cove Blue	<b>GW9002</b> Grey White	<b>PB1035</b> Pearl Beige
<b>BMAT</b> Bronze Matte	<b>CW9001</b> Cream	<b>HTHR</b> Heather	<b>RUST</b> Rust
<b>BRNZ</b> Bronze	<b>GLIM</b> Glimmer	<b>JB9005</b> Jet Black	<b>SUNG</b> Sungold
<b>BSIL</b> Blade Silver	<b>GSIL</b> Graphite Silver	<b>OBRZ</b> Old Bronze	<b>TW9016</b> Traffic White

**C OPTION**

⚠ Option availability may be interdependent with Voltage, Source or Other Options

**XPS** Express 10 day shipping. Items marked with a bullet (•) are not available with XPS



XPS



LED



ETL Listed




5 Year Warranty

**OW1041 – COLONNADE**  
Outdoor only




**Photometrics**



**Technical Information**

- Integral power supply
- Modular design for replacement of LED source and power supply
- Mounts to standard electrical junction box (by others) with provided hardware
- Solid metal accent bars; sealed and gasketed construction
- 1/8" thick white acrylic diffuser
  - ◆ F1 rated, UV stable
  - ◆ UL-94 HB Flame Class rated
- No VOC powder coat paint finish
- ETL Listed for wet location mounting 4' above grade

**Relative Scale Drawing**

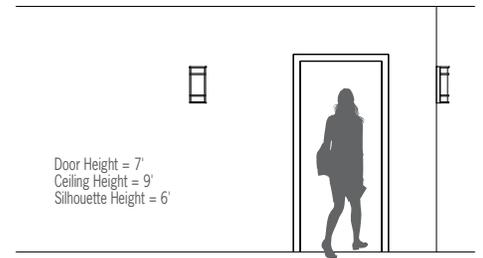

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For additional information see [VisaLighting.com/materials-finishes](http://VisaLighting.com/materials-finishes)

**Painted Finishes (Standard)**



This document contains information which is the property of Visa Lighting, and may not, in whole or in part, be duplicated, disclosed, or used for design or manufacturing purposes without the prior written permission of Visa Lighting. ©Visa Lighting. Design Modification Rights Reserved.