


- PLAN NOTES**
1. REMOVE EXISTING ASPHALT PAVEMENT COMPLETE. MAKE STRAIGHT SAW-CUT AT TERMINATION.
  2. REMOVE EXISTING CONCRETE CURB COMPLETE. MAKE STRAIGHT SAW-CUT AT TERMINATION.
  3. REMOVE EXISTING CONCRETE WALK AND CURB COMPLETE. MAKE STRAIGHT SAW-CUT AT NEXT ADJACENT JOINT.
  4. REMOVE EXISTING CONCRETE WALK COMPLETE.
  5. REMOVE EXISTING CONCRETE COMPLETE.
  6. EXISTING LIGHT POLE TO BE REMOVED BY UTILITY COMPANY.
  7. REMOVE EXISTING BUILDING & ASSOCIATED FOOTINGS COMPLETE.
  8. REMOVE EXISTING PAINTINGS COMPLETE.
  9. REMOVE EXISTING WOOD FENCE COMPLETE.
  10. REMOVE EXISTING SHED COMPLETE.
  11. REMOVE EXISTING GARAGE.
  12. REMOVE EXISTING BRICK CHIMNEY.
  13. REMOVE EXISTING MONUMENT AND CONCRETE BASE.
  14. REMOVE EXISTING OVERHEAD ELECTRIC LINE.
  15. ADJUST CASTING TO PROPOSED GRADE. SEE GRADING PLAN.

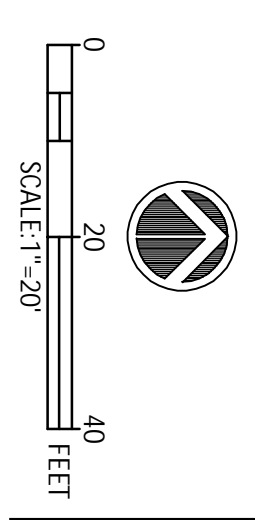

**SITE DEMOLITION PLAN**

SCALE: 1" = 20'

DATE: JAN 25, 2019

PROJECT #: 18JPCS57

DRAWN: CLM

COORD: ADS

APPROVED: ADS

**C200**



NUMBER	DATE	DESCRIPTION

**TOWN SUBMITTAL**

**PLAINFIELD ORTHODONTICS CLINIC**  
**419 DAN JONES ROAD**  
**PLAINFIELD, IN 46168**

**JPS CONSULTING ENGINEERS, LLC**  
 9365 Counselors Row, Suite 116  
 Indianapolis, IN 46240  
 ph 317.617.4270  
 www.jpsconsultingengineers.com