D-Series Size 1

LED Area Luminaire

Catalog Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

Specifications

EPA:	1.01 ft² (0.09 m²)
Length:	33″ (83.8 cm)
Width:	13″ (33.0 cm)
Height:	7-1/2″ (19.0 cm)
Weight (max):	27 lbs (12.2 kg)

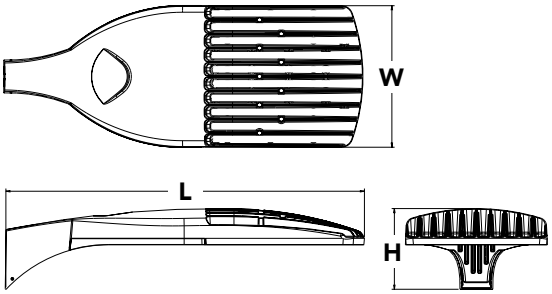

A+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and system-level interoperability.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is A+ Certified when ordered with DTL® controls marked by a shaded background. DTL DLL equipped luminaires meet the A+ specification for luminaire to photocontrol interoperability1
- This luminaire is part of an A+ Certified solution for ROAM® or XPoint™ Wireless control networks, providing out-of-the-box control compatibility with simple commissioning, when ordered with drivers and control options marked by a shaded background[1]

To learn more about A+, visit www.acuitybrands.com/aplus.

1. See ordering tree for details.
2. A+ Certified Solutions for ROAM require the order of one ROAM node per luminaire. Sold Separately: Link to Roam; Link to DTL DLL

A+ Capable options indicated by this color background.

Ordering Information

EXAMPLE: DSX1 LED P7 40K T3M MVOLT SPA DDBXD

DSX1LED

Series

DSX1 LED

LEDs

Forward optics

P1	P4	P7
P2	P5	P8
P3	P6	P9

Rotated optics

P10[1]	P12[1]
P11[1]	P13[1]

Color temperature

30K	3000 K
40K	4000 K
50K	5000 K
AMBPC	Amber phosphor converted[2]

Distribution

T1S	Type I short	T5S	Type V short
T2S	Type II short	T5M	Type V medium
T2M	Type II medium	T5W	Type V wide
T3S	Type III short	BLC	Backlight control[2,3]
T3M	Type III medium	LCCO	Left corner cutoff[2,3]
T4M	Type IV medium	RCCO	Right corner cutoff[2,3]
TFTM	Forward throw medium		
T5VS	Type V very short		

Voltage

MVOLT[4,5]
120[6]
208[5,6]
240[5,6]
277[6]
347[5,6,7]
480[5,6,7]

Mounting

Shipped included

SPA	Square pole mounting
RPA	Round pole mounting
WBA	Wall bracket
SPUMBA	Square pole universal mounting adaptor[8]
RPUMBA	Round pole universal mounting adaptor[8]

Shipped separately

KMA8 DDBXD U	Mast arm mounting bracket adaptor (specify finish)[9]

Control options

Shipped installed

NLTAIR2	nLight AIR generation 2 enabled[10]
PER	NEMA twist-lock receptacle only (controls ordered separate)[11]
PER5	Five-wire receptacle only (controls ordered separate)[11,12]
PER7	Seven-wire receptacle only (controls ordered separate)[11,12]
DMG	0-10V dimming extend out back of honsing for external control (leads exit fixture)
DS	Dual switching[13,14]
PIR	Bi-level, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 5fc[5,15,16]
PIRH	Bi-level, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 5fc[5,15,16]
PIRHN	Network, Bi-Level motion/ambient sensor[17]
PIR1FC3V	Bi-level, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc[5,15,16]
PIRH1FC3V	Bi-level, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 1fc[5,15,16]
BL30	Bi-level switched dimming, 30%[5,14,18]
BL50	Bi-level switched dimming, 50%[5,14,18]
PNMTDD3	Part night, dim till dawn[5,19]
PNMT5D3	Part night, dim 5 hrs[5,19]
PNMT6D3	Part night, dim 6 hrs[5,19]
PNMT7D3	Part night, dim 7 hrs[5,19]
FAO	Field adjustable output[20]

Other options

Shipped installed

HS	House-side shield[21]
SF	Single fuse (120, 277, 347V)[6]
DF	Double fuse (208, 240, 480V)[6]
L90	Left rotated optics[1]
R90	Right rotated optics[1]

Shipped separately

BS	Bird spikes[22]
EGS	External glare shield[22]

Finish *(required)*

DDBXD	Dark bronze
DBLXD	Black
DNAXD	Natural aluminum
DWHXD	White
DDBTXD	Textured dark bronze
DBLBXD	Textured black
DNATXD	Textured natural aluminum
DWHGXD	Textured white

© 2011-2018 Acuity Brands Lighting, Inc. All rights reserved.

Ordering Information

Accessories

Ordered and shipped separately.

DLL127F 1.5 JU	Photocell - SSL twist-lock (120-277V) [23]
DLL347F 1.5 CUL JU	Photocell - SSL twist-lock (347V) [23]
DLL480F 1.5 CUL JU	Photocell - SSL twist-lock (480V) [23]
DSHORT SBK U	Shorting cap [23]
DSX1HS 30C U	House-side shield for 30 LED unit[21]
DSX1HS 40C U	House-side shield for 40 LED unit[21]
DSX1HS 60C U	House-side shield for 60 LED unit[21]
PUMBA DDBXD U*	Square and round pole universal mounting bracket (specify finish)[24]
KMA8 DDBXD U	Mast arm mounting bracket adaptor (specify finish) [8]

For more control options, visit DTL and ROAM online.

NOTES
1 P10, P11, P12 or P13 and rotated optics (L90, R90) only available together.
2 AMBPC is not available with BLC, LCCO, RCCO or P4, P7, P8, P9 or P13.
3 Not available with HS.
4 MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
5 Any PIRx with BL30, BL50 or PNMT, is not available with 208V, 240V, 347V, 480V or MVOLT. It is only available in 120V or 277V specified.
6 Single fuse (SF) requires 120V, 277V or 347V. Double fuse (DF) requires 208V, 240V or 480V.
7 Not available in P1 or P10. Not available with BL30, BL50 or PNMT options.
8 Existing drilled pole only. Available as a separate combination accessory; for retrofit use only: PUMBA (finish) U; 1.5 G vibration load rating per ANCI C136.31.
9 Must order fixture with SPA option. Must be ordered as a separate accessory; see Accessories information. For use with 2-3/8" mast arm (not included).
10 Must be ordered with PIRHN.
11 Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Not available with DS option. Shorting cap included.
12 If ROAM® node required, it must be ordered and shipped as a separate line item from Acuity Brands Controls. Not available with DCR. Node with integral dimming. Shorting cap included.
13 Provides 50/50fixture operation via (2) independent drivers. Not available with PER, PER5, PER7, PIR or PIRH. Not available P1, P2, P3, P4 or P5.
14 Requires (2) separately switched circuits.
15 Reference Motion Sensor table on page 3.
16 Reference PER table on page 3 to see functionality.
17 Must be ordered with NLTAIR2. For more information on nLight Air 2 visit this link.
18 Not available with 347V, 480V, PNMT, DS. For PER5 or PER7, see PER Table on page 3. Requires isolated neutral.
19 Not available with 347V, 480V, DS, BL30, BL50. For PER5 or PER7, see PER Table on page 3. Separate Dusk to Dawn required.
20 Not available with other dimming controls options
21 Not available with BLC, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
22 Must be ordered with fixture for factory pre-drilling.
23 Requires luminaire to be specified with PER, PER5 or PER7 option. See PER Table on page 3.
24 For retrofit use only.

External Glare Shield

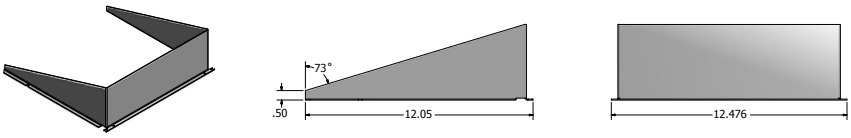

Drilling

HANDHOLE ORIENTATION



Template #8

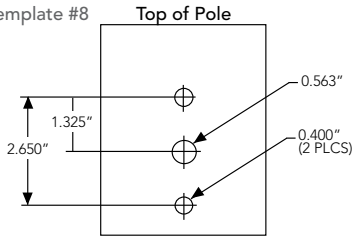

Tenon Mounting Slipfitter **

Tenon O.D.	Single Unit	2 at 180°	2 at 90°	3 at 120°	3 at 90°	4 at 90°
2-3/8"	AST20-190	AST20-280	AST20-290	AST20-320	AST20-390	AST20-490
2-7/8"	AST25-190	AST25-280	AST25-290	AST25-320	AST25-390	AST25-490
4"	AST35-190	AST35-280	AST35-290	AST35-320	AST35-390	AST35-490

Pole drilling nomenclature: # of heads at degree from handhole (default side A)					
DM19AS	DM28AS	DM29AS	DM32AS	DM39AS	DM49AS
1 @ 90°	2 @ 280°	2 @ 90°	3 @ 120°	3 @ 90°	4 @ 90°
Side B	Side B & D	Side B & C	Round pole only	Side B, C, & D	Sides A, B, C, D
Note: Review luminaire spec sheet for specific nomenclature					

Pole top or tenon O.D.	4.5" @ 90°	4" @ 90°	3.5" @ 90°	3" @ 90°	4.5" @ 120°	4" @ 120°	3.5" @ 120°	3" @ 120°
DSX SPA	Y	Y	Y	N	-	-	-	-
DSX RPA	Y	Y	N	N	Y	Y	Y	Y
DSX SPUMBA	Y	N	N	N	-	-	-	-
DSX RPUMBA	N	N	N	N	Y	Y	Y	N
					*3 fixtures @120 require round pole top/tenon.			

Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's D-Series Area Size 1 homepage.

Isofootcandle plots for the DSX1 LED 60C 1000 40K. Distances are in units of mounting height (25').

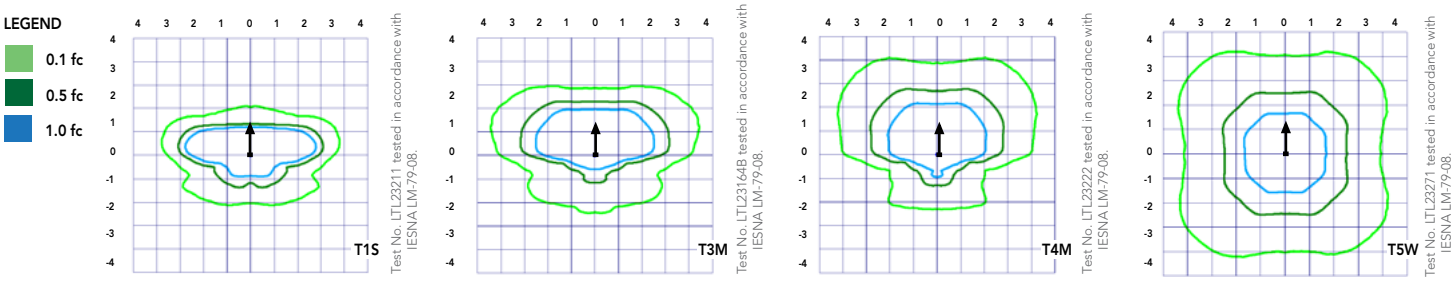

© 2011-2018 Acuity Brands Lighting, Inc. All rights reserved.

Performance Data

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.04
5°C	41°F	1.04
10°C	50°F	1.03
15°C	50°F	1.02
20°C	68°F	1.01
25°C	**77°F**	**1.00**
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.97

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25000	50000	100000
Lumen Maintenance Factor	1.00	0.96	0.92	0.85

Electrical Load

					Current (A)					
	Performance Package	LED Count	Drive Current	Wattage	120	208	240	277	347	480
Forward Optics (Non-Rotated)	P1	30	530	54	0.45	0.26	0.23	0.19	0.10	0.12
	P2	30	700	70	0.59	0.34	0.30	0.25	0.20	0.16
	P3	30	1050	102	0.86	0.50	0.44	0.38	0.30	0.22
	P4	30	1250	125	1.06	0.60	0.52	0.46	0.37	0.27
	P5	30	1400	138	1.16	0.67	0.58	0.51	0.40	0.29
	P6	40	1250	163	1.36	0.78	0.68	0.59	0.47	0.34
	P7	40	1400	183	1.53	0.88	0.76	0.66	0.53	0.38
	P8	60	1050	207	1.74	0.98	0.87	0.76	0.64	0.49
	P9	60	1250	241	2.01	1.16	1.01	0.89	0.70	0.51
Rotated Optics (Requires L90 or R90)	P10	60	530	106	0.90	0.52	0.47	0.43	0.33	0.27
	P11	60	700	137	1.15	0.67	0.60	0.53	0.42	0.32
	P12	60	1050	207	1.74	0.99	0.87	0.76	0.60	0.46
	P13	60	1250	231	1.93	1.12	0.97	0.86	0.67	0.49

Motion Sensor Default Settings						
Option	Dimmed State	High Level (when triggered)	Phototcell Operation	Dwell Time	Ramp-up Time	Ramp-down Time
PIR or PIRH	3V (37%) Output	10V (100%) Output	Enabled @ 5FC	5 min	3 sec	5 min
*PIR1FC3V or PIRH1FC3V	3V (37%) Output	10V (100%) Output	Enabled @ 1FC	5 min	3 sec	5 min
*for use with Inline Dusk to Dawn or timer.						

PER Table						
Control	PER (3 wire)	PER5 (5 wire)		PER7 (7 wire)		
			Wire 4/Wire5		Wire 4/Wire5	Wire 6/Wire7
Photocontrol Only (On/Off)	✔	⚠	Wired to dimming leads on driver	⚠	Wired to dimming leads on driver	Wires Capped inside fixture
ROAM	⊘	✔	Wired to dimming leads on driver	⚠	Wired to dimming leads on driver	Wires Capped inside fixture
ROAM with Motion (ROAM on/off only)	⊘	⚠	Wires Capped inside fixture	⚠	Wires Capped inside fixture	Wires Capped inside fixture
Future-proof*	⊘	⚠	Wired to dimming leads on driver	✔	Wired to dimming leads on driver	Wires Capped inside fixture
Future-proof* with Motion	⊘	⚠	Wires Capped inside fixture	✔	Wires Capped inside fixture	Wires Capped inside fixture

✔ Recommended
⊘ Will not work
⚠ Alternate

*Future-proof means: Ability to change controls in the future.

© 2011-2018 Acuity Brands Lighting, Inc. All rights reserved.

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Forward Optics

LED Count	Drive Current	Power Package	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
30	530	P1	54W	T1S	6,457	2	0	2	120	6,956	2	0	2	129	7,044	2	0	2	130	3,640	1	0	1	70
				T2S	6,450	2	0	2	119	6,949	2	0	2	129	7,037	2	0	2	130	3,813	1	0	1	73
				T2M	6,483	1	0	1	120	6,984	2	0	2	129	7,073	2	0	2	131	3,689	1	0	1	71
				T3S	6,279	2	0	2	116	6,764	2	0	2	125	6,850	2	0	2	127	3,770	1	0	1	73
				T3M	6,468	1	0	2	120	6,967	1	0	2	129	7,056	1	0	2	131	3,752	1	0	1	72
				T4M	6,327	1	0	2	117	6,816	1	0	2	126	6,902	1	0	2	128	3,758	1	0	1	72
				TFTM	6,464	1	0	2	120	6,963	1	0	2	129	7,051	1	0	2	131	3,701	1	0	1	71
				T5VS	6,722	2	0	0	124	7,242	3	0	0	134	7,334	3	0	0	136	3,928	2	0	0	76
				T5S	6,728	2	0	1	125	7,248	2	0	1	134	7,340	2	0	1	136	3,881	2	0	0	75
				T5M	6,711	3	0	1	124	7,229	3	0	1	134	7,321	3	0	2	136	3,930	2	0	1	76
				T5W	6,667	3	0	2	123	7,182	3	0	2	133	7,273	3	0	2	135	3,820	3	0	1	73
				BLC	5,299	1	0	1	98	5,709	1	0	2	106	5,781	1	0	2	107					
				LCCO	3,943	1	0	2	73	4,248	1	0	2	79	4,302	1	0	2	80					
				RCCO	3,943	1	0	2	73	4,248	1	0	2	79	4,302	1	0	2	80					
30	700	P2	70W	T1S	8,249	2	0	2	118	8,886	2	0	2	127	8,999	2	0	2	129	4,561	1	0	1	67
				T2S	8,240	2	0	2	118	8,877	2	0	2	127	8,989	2	0	2	128	4,777	1	0	1	70
				T2M	8,283	2	0	2	118	8,923	2	0	2	127	9,036	2	0	2	129	4,622	1	0	2	68
				T3S	8,021	2	0	2	115	8,641	2	0	2	123	8,751	2	0	2	125	4,724	1	0	1	69
				T3M	8,263	2	0	2	118	8,901	2	0	2	127	9,014	2	0	2	129	4,701	1	0	2	69
				T4M	8,083	2	0	2	115	8,708	2	0	2	124	8,818	2	0	2	126	4,709	1	0	2	69
				TFTM	8,257	2	0	2	118	8,896	2	0	2	127	9,008	2	0	2	129	4,638	1	0	2	68
				T5VS	8,588	3	0	0	123	9,252	3	0	0	132	9,369	3	0	0	134	4,922	2	0	0	72
				T5S	8,595	3	0	1	123	9,259	3	0	1	132	9,376	3	0	1	134	4,863	2	0	0	72
				T5M	8,573	3	0	2	122	9,236	3	0	2	132	9,353	3	0	2	134	4,924	3	0	1	72
				T5W	8,517	3	0	2	122	9,175	4	0	2	131	9,291	4	0	2	133	4,787	3	0	1	70
				BLC	6,770	1	0	2	97	7,293	1	0	2	104	7,386	1	0	2	106					
				LCCO	5,038	1	0	2	72	5,427	1	0	2	78	5,496	1	0	2	79					
				RCCO	5,038	1	0	2	72	5,427	1	0	2	78	5,496	1	0	2	79					
30	1050	P3	102W	T1S	11,661	2	0	2	114	12,562	3	0	3	123	12,721	3	0	3	125					
				T2S	11,648	2	0	2	114	12,548	3	0	3	123	12,707	3	0	3	125					
				T2M	11,708	2	0	2	115	12,613	2	0	2	124	12,773	2	0	2	125					
				T3S	11,339	2	0	2	111	12,215	3	0	3	120	12,370	3	0	3	121					
				T3M	11,680	2	0	2	115	12,582	2	0	2	123	12,742	2	0	2	125					
				T4M	11,426	2	0	3	112	12,309	2	0	3	121	12,465	2	0	3	122					
				TFTM	11,673	2	0	2	114	12,575	2	0	3	123	12,734	2	0	3	125					
				T5VS	12,140	3	0	1	119	13,078	3	0	1	128	13,244	3	0	1	130					
				T5S	12,150	3	0	1	119	13,089	3	0	1	128	13,254	3	0	1	130					
				T5M	12,119	4	0	2	119	13,056	4	0	2	128	13,221	4	0	2	130					
				T5W	12,040	4	0	3	118	12,970	4	0	3	127	13,134	4	0	3	129					
				BLC	9,570	1	0	2	94	10,310	1	0	2	101	10,440	1	0	2	102					
				LCCO	7,121	1	0	3	70	7,671	1	0	3	75	7,768	1	0	3	76					
				RCCO	7,121	1	0	3	70	7,671	1	0	3	75	7,768	1	0	3	76					
30	1250	P4	125W	T1S	13,435	3	0	3	107	14,473	3	0	3	116	14,657	3	0	3	117					
				T2S	13,421	3	0	3	107	14,458	3	0	3	116	14,641	3	0	3	117					
				T2M	13,490	2	0	2	108	14,532	3	0	3	116	14,716	3	0	3	118					
				T3S	13,064	3	0	3	105	14,074	3	0	3	113	14,252	3	0	3	114					
				T3M	13,457	2	0	2	108	14,497	2	0	2	116	14,681	2	0	2	117					
				T4M	13,165	2	0	3	105	14,182	2	0	3	113	14,362	2	0	3	115					
				TFTM	13,449	2	0	3	108	14,488	2	0	3	116	14,672	2	0	3	117					
				T5VS	13,987	4	0	1	112	15,068	4	0	1	121	15,259	4	0	1	122					
				T5S	13,999	3	0	1	112	15,080	3	0	1	121	15,271	3	0	1	122					
				T5M	13,963	4	0	2	112	15,042	4	0	2	120	15,233	4	0	2	122					
				T5W	13,872	4	0	3	111	14,944	4	0	3	120	15,133	4	0	3	121					
				BLC	11,027	1	0	2	88	11,879	1	0	2	95	12,029	1	0	2	96					
				LCCO	8,205	1	0	3	66	8,839	1	0	3	71	8,951	1	0	3	72					
				RCCO	8,205	1	0	3	66	8,839	1	0	3	71	8,951	1	0	3	72					
30	1400	P5	138W	T1S	14,679	3	0	3	106	15,814	3	0	3	115	16,014	3	0	3	116					
				T2S	14,664	3	0	3	106	15,797	3	0	3	114	15,997	3	0	3	116					
				T2M	14,739	3	0	3	107	15,878	3	0	3	115	16,079	3	0	3	117					
				T3S	14,274	3	0	3	103	15,377	3	0	3	111	15,572	3	0	3	113					
				T3M	14,704	2	0	3	107	15,840	3	0	3	115	16,040	3	0	3	116					
				T4M	14,384	2	0	3	104	15,496	3	0	3	112	15,692	3	0	3	114					
				TFTM	14,695	2	0	3	106	15,830	3	0	3	115	16,030	3	0	3	116					
				T5VS	15,283	4	0	1	111	16,464	4	0	1	119	16,672	4	0	1	121					
				T5S	15,295	3	0	1	111	16,477	4	0	1	119	16,686	4	0	1	121					
				T5M	15,257	4	0	2	111	16,435	4	0	2	119	16,644	4	0	2	121					
				T5W	15,157	4	0	3	110	16,328	4	0	3	118	16,534	4	0	3	120					
				BLC	12,048	1	0	2	87	12,979	1	0	2	94	13,143	1	0	2	95					
				LCCO	8,965	1	0	3	65	9,657	1	0	3	70	9,780	1	0	3	71					
					8,965	1	0	3	65	9,657	1	0	3	70	9,780	1	0	3	71					

© 2011-2018 Acuity Brands Lighting, Inc. All rights reserved.

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Forward Optics

LED Count	Drive Current	Power Package	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lu-mens	B	U	G	LPW
40	1250	**P6**	163W	T1S	17,654	3	0	3	108	19,018	3	0	3	117	19,259	3	0	3	118					
				T2S	17,635	3	0	3	108	18,998	3	0	3	117	19,238	3	0	3	118					
				T2M	17,726	3	0	3	109	19,096	3	0	3	117	19,337	3	0	3	119					
				T3S	17,167	3	0	3	105	18,493	3	0	3	113	18,727	3	0	3	115					
				T3M	17,683	3	0	3	108	19,049	3	0	3	117	19,290	3	0	3	118					
				T4M	17,299	3	0	3	106	18,635	3	0	4	114	18,871	3	0	4	116					
				TFTM	17,672	3	0	3	108	19,038	3	0	4	117	19,279	3	0	4	118					
				T5VS	18,379	4	0	1	113	19,800	4	0	1	121	20,050	4	0	1	123					
				T5S	18,394	4	0	2	113	19,816	4	0	2	122	20,066	4	0	2	123					
				T5M	18,348	4	0	2	113	19,766	4	0	2	121	20,016	4	0	2	123					
				T5W	18,228	5	0	3	112	19,636	5	0	3	120	19,885	5	0	3	122					
				BLC	14,489	2	0	2	89	15,609	2	0	3	96	15,806	2	0	3	97					
				LCCO	10,781	1	0	3	66	11,614	1	0	3	71	11,761	2	0	3	72					
				RCCO	10,781	1	0	3	66	11,614	1	0	3	71	11,761	2	0	3	72					
40	1400	**P7**	183W	T1S	19,227	3	0	3	105	20,712	3	0	3	113	20,975	3	0	3	115					
				T2S	19,206	3	0	3	105	20,690	3	0	3	113	20,952	3	0	3	114					
				T2M	19,305	3	0	3	105	20,797	3	0	3	114	21,060	3	0	3	115					
				T3S	18,696	3	0	3	102	20,141	3	0	3	110	20,396	3	0	4	111					
				T3M	19,258	3	0	3	105	20,746	3	0	3	113	21,009	3	0	3	115					
				T4M	18,840	3	0	4	103	20,296	3	0	4	111	20,553	3	0	4	112					
				TFTM	19,246	3	0	4	105	20,734	3	0	4	113	20,996	3	0	4	115					
				T5VS	20,017	4	0	1	109	21,564	4	0	1	118	21,837	4	0	1	119					
				T5S	20,033	4	0	2	109	21,581	4	0	2	118	21,854	4	0	2	119					
				T5M	19,983	4	0	2	109	21,527	5	0	3	118	21,799	5	0	3	119					
				T5W	19,852	5	0	3	108	21,386	5	0	3	117	21,656	5	0	3	118					
				BLC	15,780	2	0	3	86	16,999	2	0	3	93	17,214	2	0	3	94					
				LCCO	11,742	2	0	3	64	12,649	2	0	3	69	12,809	2	0	3	70					
				RCCO	11,742	2	0	3	64	12,649	2	0	3	69	12,809	2	0	3	70					
60	1050	**P8**	207W	T1S	22,490	3	0	3	109	24,228	3	0	3	117	24,535	3	0	3	119					
				T2S	22,466	3	0	4	109	24,202	3	0	4	117	24,509	3	0	4	118					
				T2M	22,582	3	0	3	109	24,327	3	0	3	118	24,635	3	0	3	119					
				T3S	21,870	3	0	4	106	23,560	3	0	4	114	23,858	3	0	4	115					
				T3M	22,527	3	0	4	109	24,268	3	0	4	117	24,575	3	0	4	119					
				T4M	22,038	3	0	4	106	23,741	3	0	4	115	24,041	3	0	4	116					
				TFTM	22,513	3	0	4	109	24,253	3	0	4	117	24,560	3	0	4	119					
				T5VS	23,415	5	0	1	113	25,224	5	0	1	122	25,543	5	0	1	123					
				T5S	23,434	4	0	2	113	25,244	4	0	2	122	25,564	4	0	2	123					
				T5M	23,374	5	0	3	113	25,181	5	0	3	122	25,499	5	0	3	123					
				T5W	23,221	5	0	4	112	25,016	5	0	4	121	25,332	5	0	4	122					
				BLC	18,458	2	0	3	89	19,885	2	0	3	96	20,136	2	0	3	97					
				LCCO	13,735	2	0	3	66	14,796	2	0	4	71	14,983	2	0	4	72					
				RCCO	13,735	2	0	3	66	14,796	2	0	4	71	14,983	2	0	4	72					
60	1250	**P9**	241W	T1S	25,575	3	0	3	106	27,551	3	0	3	114	27,900	3	0	3	116					
				T2S	25,548	3	0	4	106	27,522	3	0	4	114	27,871	3	0	4	116					
				T2M	25,680	3	0	3	107	27,664	3	0	3	115	28,014	3	0	3	116					
				T3S	24,870	3	0	4	103	26,791	3	0	4	111	27,130	3	0	4	113					
				T3M	25,617	3	0	4	106	27,597	3	0	4	115	27,946	3	0	4	116					
				T4M	25,061	3	0	4	104	26,997	3	0	4	112	27,339	3	0	4	113					
				TFTM	25,602	3	0	4	106	27,580	3	0	4	114	27,929	3	0	4	116					
				T5VS	26,626	5	0	1	110	28,684	5	0	1	119	29,047	5	0	1	121					
				T5S	26,648	4	0	2	111	28,707	5	0	2	119	29,070	5	0	2	121					
				T5M	26,581	5	0	3	110	28,635	5	0	3	119	28,997	5	0	3	120					
				T5W	26,406	5	0	4	110	28,447	5	0	4	118	28,807	5	0	4	120					
				BLC	20,990	2	0	3	87	22,612	2	0	3	94	22,898	2	0	3	95					
				LCCO	15,619	2	0	4	65	16,825	2	0	4	70	17,038	2	0	4	71					
					15,619	2	0	4	65	16,825	2	0	4	70	17,038	2	0	4	71					

© 2011-2018 Acuity Brands Lighting, Inc. All rights reserved.

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Rotated Optics

LED Count	Drive Current	Power Package	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
60	530	**P10**	106W	T1S	13,042	3	0	3	123	14,050	3	0	3	133	14,228	3	0	3	134	7,167	2	0	2	72
				T2S	12,967	4	0	4	122	13,969	4	0	4	132	14,146	4	0	4	133	7,507	2	0	2	76
				T2M	13,201	3	0	3	125	14,221	3	0	3	134	14,401	3	0	3	136	7,263	2	0	2	73
				T3S	12,766	4	0	4	120	13,752	4	0	4	130	13,926	4	0	4	131	7,424	2	0	2	75
				T3M	13,193	4	0	4	124	14,213	4	0	4	134	14,393	4	0	4	136	7,387	2	0	2	75
				T4M	12,944	4	0	4	122	13,945	4	0	4	132	14,121	4	0	4	133	7,400	2	0	2	75
				TFTM	13,279	4	0	4	125	14,305	4	0	4	135	14,486	4	0	4	137	7,288	1	0	2	74
				T5VS	13,372	3	0	1	126	14,405	4	0	1	136	14,588	4	0	1	138	7,734	3	0	1	78
				T5S	13,260	3	0	1	125	14,284	3	0	1	135	14,465	3	0	1	136	7,641	3	0	0	77
				T5M	13,256	4	0	2	125	14,281	4	0	2	135	14,462	4	0	2	136	7,737	3	0	2	78
				T5W	13,137	4	0	3	124	14,153	4	0	3	134	14,332	4	0	3	135	7,522	3	0	2	76
				BLC	10,906	3	0	3	103	11,749	3	0	3	111	11,898	3	0	3	112					
				LCCO	7,789	1	0	3	73	8,391	1	0	3	79	8,497	1	0	3	80					
				RCCO	7,779	4	0	4	73	8,380	4	0	4	79	8,486	4	0	4	80					
60	700	**P11**	137W	T1S	16,556	3	0	3	121	17,835	3	0	3	130	18,061	4	0	4	132	8,952	2	0	2	68
				T2S	16,461	4	0	4	120	17,733	4	0	4	129	17,957	4	0	4	131	9,377	2	0	2	72
				T2M	16,758	4	0	4	122	18,053	4	0	4	132	18,281	4	0	4	133	9,072	2	0	2	69
				T3S	16,205	4	0	4	118	17,457	4	0	4	127	17,678	4	0	4	129	9,273	2	0	2	71
				T3M	16,748	4	0	4	122	18,042	4	0	4	132	18,271	4	0	4	133	9,227	2	0	2	70
				T4M	16,432	4	0	4	120	17,702	4	0	4	129	17,926	4	0	4	131	9,243	2	0	2	71
				TFTM	16,857	4	0	4	123	18,159	4	0	4	133	18,389	4	0	4	134	9,103	2	0	2	69
				T5VS	16,975	4	0	1	124	18,287	4	0	1	133	18,518	4	0	1	135	9,661	3	0	1	74
				T5S	16,832	4	0	1	123	18,133	4	0	2	132	18,362	4	0	2	134	9,544	3	0	1	73
				T5M	16,828	4	0	2	123	18,128	4	0	2	132	18,358	4	0	2	134	9,665	3	0	2	74
				T5W	16,677	4	0	3	122	17,966	5	0	3	131	18,193	5	0	3	133	9,395	4	0	2	72
				BLC	13,845	3	0	3	101	14,915	3	0	3	109	15,103	3	0	3	110					
				LCCO	9,888	1	0	3	72	10,652	2	0	3	78	10,787	2	0	3	79					
				RCCO	9,875	4	0	4	72	10,638	4	0	4	78	10,773	4	0	4	79					
60	1050	**P12**	207W	T1S	22,996	4	0	4	111	24,773	4	0	4	120	25,087	4	0	4	121					
				T2S	22,864	4	0	4	110	24,631	5	0	5	119	24,943	5	0	5	120					
				T2M	23,277	4	0	4	112	25,075	4	0	4	121	25,393	4	0	4	123					
				T3S	22,509	4	0	4	109	24,248	5	0	5	117	24,555	5	0	5	119					
				T3M	23,263	4	0	4	112	25,061	4	0	4	121	25,378	4	0	4	123					
				T4M	22,824	5	0	5	110	24,588	5	0	5	119	24,899	5	0	5	120					
				TFTM	23,414	5	0	5	113	25,223	5	0	5	122	25,543	5	0	5	123					
				T5VS	23,579	5	0	1	114	25,401	5	0	1	123	25,722	5	0	1	124					
				T5S	23,380	4	0	2	113	25,187	4	0	2	122	25,506	4	0	2	123					
				T5M	23,374	5	0	3	113	25,181	5	0	3	122	25,499	5	0	3	123					
				T5W	23,165	5	0	4	112	24,955	5	0	4	121	25,271	5	0	4	122					
				BLC	19,231	4	0	4	93	20,717	4	0	4	100	20,979	4	0	4	101					
				LCCO	13,734	2	0	3	66	14,796	2	0	4	71	14,983	2	0	4	72					
				RCCO	13,716	4	0	4	66	14,776	4	0	4	71	14,963	4	0	4	72					
60	1250	**P13**	231W	T1S	25,400	4	0	4	110	27,363	4	0	4	118	27,709	4	0	4	120					
				T2S	25,254	5	0	5	109	27,205	5	0	5	118	27,550	5	0	5	119					
				T2M	25,710	4	0	4	111	27,696	4	0	4	120	28,047	4	0	4	121					
				T3S	24,862	5	0	5	108	26,783	5	0	5	116	27,122	5	0	5	117					
				T3M	25,695	5	0	5	111	27,680	5	0	5	120	28,031	5	0	5	121					
				T4M	25,210	5	0	5	109	27,158	5	0	5	118	27,502	5	0	5	119					
				TFTM	25,861	5	0	5	112	27,860	5	0	5	121	28,212	5	0	5	122					
				T5VS	26,043	5	0	1	113	28,056	5	0	1	121	28,411	5	0	1	123					
				T5S	25,824	4	0	2	112	27,819	5	0	2	120	28,172	5	0	2	122					
				T5M	25,818	5	0	3	112	27,813	5	0	3	120	28,165	5	0	3	122					
				T5W	25,586	5	0	4	111	27,563	5	0	4	119	27,912	5	0	4	121					
				BLC	21,241	4	0	4	92	22,882	4	0	4	99	23,172	4	0	4	100					
				LCCO	15,170	2	0	4	66	16,342	2	0	4	71	16,549	2	0	4	72					
					15,150	5	0	5	66	16,321	5	0	5	71	16,527	5	0	5	72					

© 2011-2018 Acuity Brands Lighting, Inc. All rights reserved.

FEATURES & SPECIFICATIONS

INTENDED USE
The sleek design of the D-Series Size 1 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and streetscapes.

CONSTRUCTION
Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED drivers are mounted in direct contact with the casting to promote low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65). Low EPA (1.01 ft^2) for optimized pole wind loading.

FINISH
Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

OPTICS
Precision-molded proprietary acrylic lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in standard 3000 K, 4000 K and 5000 K (70 CRI) configurations. The D-Series Size 1 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

ELECTRICAL
Light engine configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L85/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

INSTALLATION
Included mounting block and integral arm facilitate quick and easy installation. Stainless steel bolts fasten the mounting block securely to poles and walls, enabling the D-Series Size 1 to withstand up to a 3.0 G vibration load rating per ANSI C136.31. The D-Series Size 1 utilizes the AERIS™ series pole drilling pattern (template #8). Optional terminal block and NEMA photocontrol receptacle are also available.

LISTINGS
UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP65 rated. Rated for -40°C minimum ambient. U.S. Patent No. D672,492 S. International patent pending.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

WARRANTY
5-year limited warranty. Complete warranty terms located at:
www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

© 2011-2018 Acuity Brands Lighting, Inc. All rights reserved.